

DS-QAE0A120G1-VB6 **120W 6-Zone Analog Amplifier**



- Rated Power: 120 W, 6 Zones
- Audio input: EMC/MIC/AUX/Bluetooth/USB/SD Card
- Support two-zone volume and content adjustment

▪ Specification

Model		DS-QAE0A120G1-VB6
Audio	Rated Power	120W
	Sensitivity	Line: -10dB EMC: -10dB MIC: -40dB line: 0dB
	Frequency Response	80Hz-18KHz (±3dB)
	THD and SNR	THD≤0.5% SNR≥83dB
Interface	Audio In	EMC IN × 1, 6.5 mm Microphone × 2, AUX IN × 2, Bluetooth, USB2.0, SD card
	Audio Out	Constant Voltage Output × 1, 110 V COM, Constant Voltage Output × 1, 70 V COM, Constant Impedance Output × 1, 4~16Ω COM, Partition Output × 6, 110 V COM, line out × 1,
	Volume Knob	MIC Volume Knob × 2, Partition 1 Volume Knob × 6, All Volume Knob × 1, Bass Volume Knob × 1, Treble Volume Knob × 1, AUX1/MP3 Volume Knob × 1, AUX2 Volume Knob × 1, EMC Volume Knob × 1
	USB	USB2.0
General	Power	200V-230V~, 50/60Hz 5A
	Material	Iron
	Dimension	484 × 88 × 360 mm
	Weight	Approx. 9.2 kg (20.28 lb.)
	Package Dimension	540 x 165 x 450 mm
	With Package Weight	Approx. 9.5 Kg(20.94 lb.)
	Color	Black
	Packing List	One machine and one power cord
	Operating Temperature	-10~+ 40°C, (±2) 20%~80% relative humidity
	Installation	Cabinet installation
	Whole Device	484 x 88 x 395 mm (including handle)


Dimension

▪ **Available Model**

DS-QAE0A120G1-VB6

▪ **Dimension**



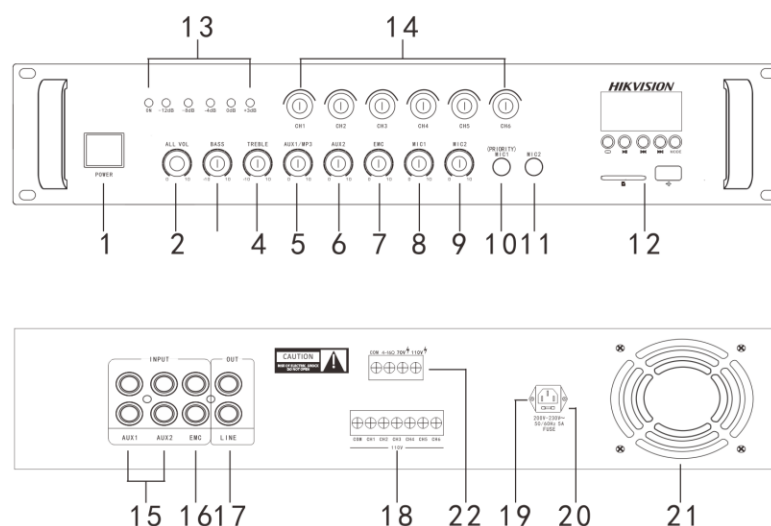

1	Power switch	13	Level indicator light
2	Master volume	14	Six zone independent volume adjustment knob
3	Bass adjustment		
4	Treble adjustment		
5	AUX1/MP3 volume adjustment	15	AUX1/AUX2 line input
6	AUX2 volume adjustment	16	Emergency input
7	Emergency volume adjustment	17	Line output
8	MIC1 Volume adjustment	18	110V constant voltage partition output
9	MIC2 Volume adjustment	19	Power socket
10	MIC1 input(PRIOROTY)	20	Fuses
11	MIC2 input	21	Power amplifier cooling fan
12	MP3 module	22	Main output of power amplifier

See Far, Go Further



www.hikvision.com
support@hikvision.com

