

**DS-QAZ1310G1T-EY(C)**  
**Network Horn Speaker Anti-corrosion Dual POE 10W**



- Rated Power: 10W
- Sensitivity(1 m, 1 W): 110 dB
- Max. SPL: 121 dB
- Frequency Response: 300 Hz to 13 kHz
- Support PoE
- Support schedule/live/emergency broadcast, alarm linkage, two-way audio, TTS
- White

## ▪ Specification


Microphone	
Type	Electret
Amount	2
Frequency Response	100 Hz to 20 kHz
Sensitivity	-42 dBV/Pa
Sampling Rate	48 kHz
Quantization Bits	16-bit
Speaker	
Rated Power	10 W
Impedance	8 Ω
Max. Acoustic Pressure	121 dBSPL
Sensitivity(1 m, 1 W)	110 dB
Direction	70° horizontal by 100° vertical
Frequency Response	300 Hz to 13 kHz
SNR	85 dB
Function	
Audio Algorithm	AEC,AGC,ANS,DRC
Audio Bit Rate	G.711ulaw (64 Kbps)/G.711alaw (64 Kbps)/MP3 (128 Kbps)
Audio File Format	WAV, MP3
NTP Timing	Support
Broadcast	Regular broadcast, live broadcast, emergency broadcast
Two-Way Audio	Support
Speech Synthesis	Language Type: English, Russian, Spanish, Japanese, Thai, Portuguese (Brazil), Korean, French
Network	
Network Protocol	IPv4, HTTP, HTTPS, SIP, SSL/TLS, DNS, NTP, TCP, UDP, IGMP, ICMP, DHCP, ARP, SSH
Interface Protocol (API)	ISAPI, ISUP, SIP, RTP, ONVIF
Client	Hik-Connect, ivms/4200, HikCentral Professional, Hik-Partner Pro, NVR, MileStone
Communication	
Communication Method	Support wired network communication
Interface	
Alarm	Alarm input ×1
Ethernet Interface	RJ45 10 M/100 M Adaptive Ethernet port × 2
Audio	Line in × 1
Power Output	12 VDC, 25 mA, 0.3 W, PoE: max. 5 W
Local Storage	Built-in 64 GB EMMC (Audio file storage is 55 GB.)
API	ISAPI, ISUP, SIP, ONVIF
Reset	Support
General	
Material	Metal
Operating Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Operating Humidity	< 90% (No condensation)
Dimension	182.4 mm × 273.87 mm × 239.38 mm (7.18" × 10.78" × 9.42")

Power	12 VDC, 1500 mA, 18 W, PoE: IEEE 802.3at, Class 4
Package Dimension	310 mm × 245 mm × 350 mm (12.2" × 9.6" × 13.8")
Weight	Approx. 2.1 kg (4.63 lb.)
With Package Weight	Approx. 3.0 kg (6.61 lb.)
Color	White
Packing List	Device × 1 Threading cap × 1 Regulatory Compliance and Safety Information × 1
Language	41 languages: English, French, Spanish, German, Italian, Japanese, Thai, Russian, Portuguese (Brazil), Arabic, Bulgarian, Czech, Danish, Greek, Spanish (Mexico), Estonian, Persian, Finnish, Hebrew, Croatian, Hungarian, Indonesian, Kazakh, Korean, Kirgiz, Lao, Lithuanian, Latvian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Serbian, Swedish, Turkish, Ukrainian, Uzbek, Vietnamese
<b>Approval</b>	
Protection	IP67, IK10
EMC	CE-EMC: EN 55032:2015+A11:2020+A1:2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019+A2:2021, EN 55035:2017+A11:2020 RCM: AS/NZS CISPR 32: 2015 IC: ICES-003: Issue 7
Safety	CB: IEC 62368-1:2014 CE-LVD: EN 62368-1:2014/A11:2017
Environment	CE-RoHS: 2011/65/EU WEEE: 2012/19/EU Reach: Regulation (EC) No 1907/2006
Anti-Corrosion Protection	NEMA 4X (NEMA 250-2018)

## ▪ Available Model

DS-QAZ1310G1T-EY(C)

## ▪ Dimension

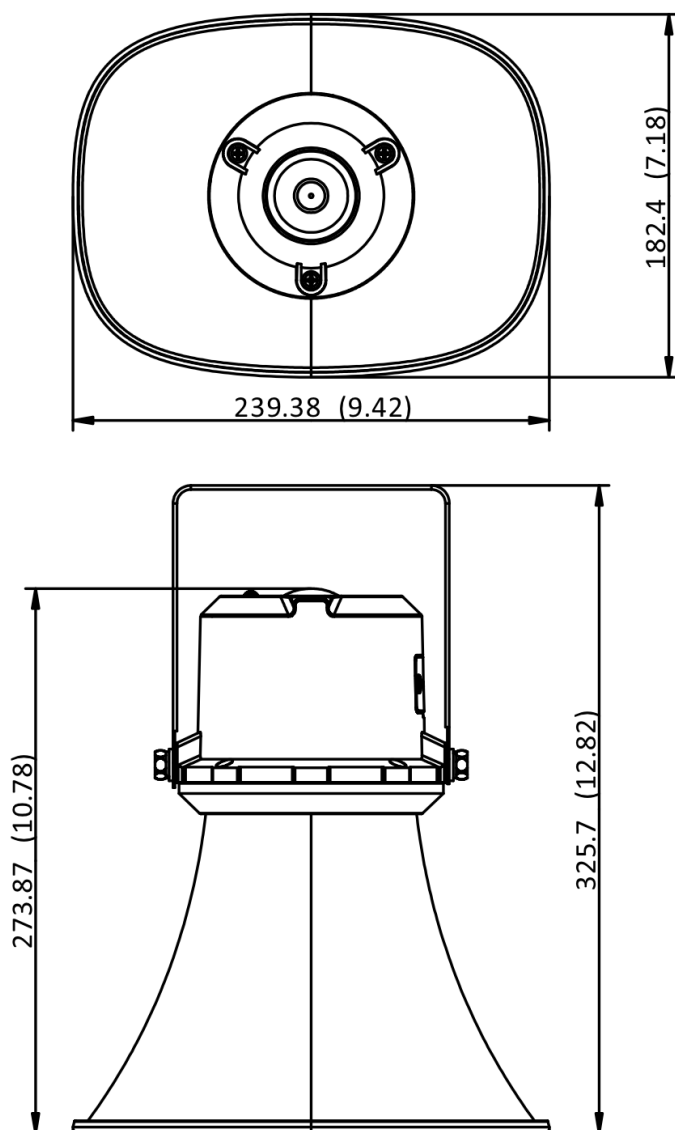

Unit: mm(inch)

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

