

VC X Surface mount build-in box volume controls

TECHNICAL SPECIFICATIONS



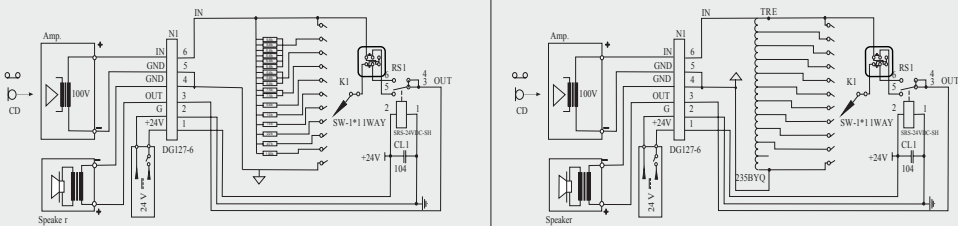
VC X

VC X volume controls are designed for background music and voice evacuation systems. VC X have Built-in 24V emergency relay and internal switch for active or passive mode selecting.

Passive mode: VC X attenuates the volume if 24V is not connected to 24V terminal. After the voltage supplying, VC X sets the maximum volume level.

Active mode: VC X set the maximum volume level if 24V is not connected to 24V terminal. After the voltage supplying, VC X starts attenuate volume. Different models have a different power, so

VC X is suitable for various size sound systems.

	VC 5RX	VC 30RX	VC 60RX
Input	5 W	30 W	60 W
Steps	10 + OFF		
Dimensions	86 x 86		
Material	Plastic		
Switch modality	DC 24 V/6 Wire		
Modality	Resistor	Transformer	
Weight	0,16 kg	0,16 kg	0,18 kg
Emergency relay	DC 24 V		
Electrical scheme			

unit: mm

VC X series

