

DS-QAZ0206G1-S
Ceiling Secondary Speaker 6W




- Full frequency 5" x 1
- Rated Power: 6 W
- Sensitivity(1 m, 1 W): 93 dB
- Max. SPL: 100 dB
- Frequency Response: 300 Hz to 15 kHz
- Support schedule/live/emergency broadcast; alarm linkage; TTS
- White

▪ Specification

Speaker	
Rated Power	6 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	100 dB SPL
Direction	All directions
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Coverage Angle	Conical Coverage: 130°
Interface	
Audio In	Fixed resistance input × 1 , 8 Ω *The primary speaker(6 W, 8 Ω) can be connected to a maximum of 1 secondary speaker(6 W, 8 Ω).
General	
Operating Temperature	10 °C to 50 °C
Material	Device body: plastic; Mesh cover: metal
Dimension	Ø179 mm × 77.5 mm (Ø7.05" × 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm × 243 mm × 175 mm (10.04" × 9.57" × 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Operating Humidity	< 90% (No condensation)
Packing List	Device × 1 Mesh cover × 1 Regulatory Compliance and Safety Information × 1



▪ Wiring

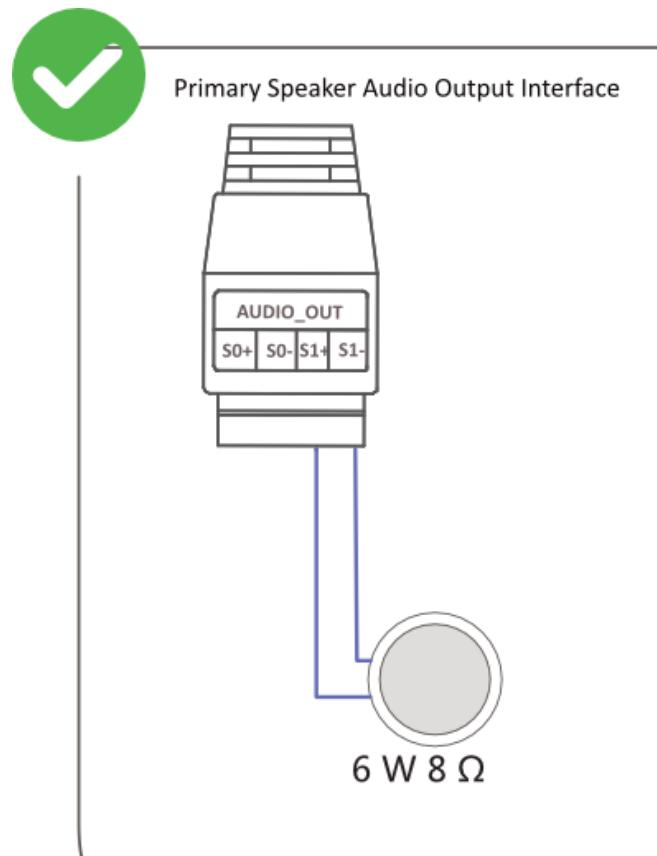

▪ Available Model


DS-QAZ0206G1-S

▪ Dimension

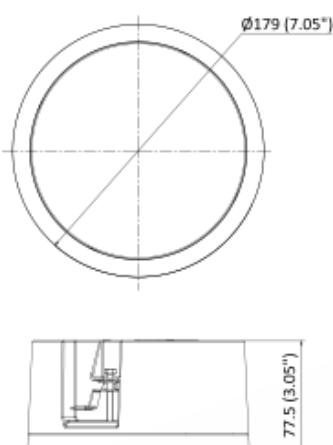

Unit: mm (inch)

Diagram of Back Interface

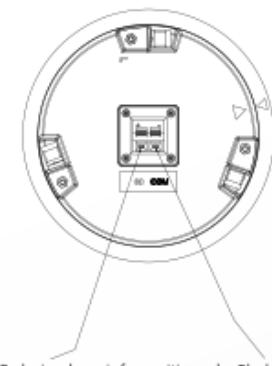

Red wire clamp is for positive pole. Black wire clamp is for negative pole.

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®