

DS-QAZ0510G1**Analog Pendant Speaker 10W**

- 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Rated Power: 100V: 10W/5W/2.5W, 70V : 10W/5W/2.5W/1.25W
- Sensitivity(1 m, 1 W): 89 dB
- Max. SPL: 98 dB
- Frequency Response: 120 Hz to 20 kHz
- White or black appearance optional

▪ Specification



Speaker	
Impedance	8Ω
Rated Power	10W
Total Harmonic Distortion (THD)	≤1%
Sensitivity(1 m, 1 W)	89dB
Max. Acoustic Pressure	98dB
Frequency Response	120Hz~20kHz(-10dB)
Speaker Unit	1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
Coverage Angle	Conical Coverage: 88°
Interface	
Audio In	Constant voltage input: 100 V/Constant voltage input: 70 V/Constant impedance input: 8 Ω
Voltage Input	100V: 10W、5W、2.5W 70V : 10W、5W、2.5W、1.25W 8Ω
General	
Material	Main body: PC Base: ABS
Dimension	Ø242.78 mm × 214.78 mm (9.56" × 8.46")
Weight	Approx. 2.7 kg (5.95 lb.)
Language	5 languages: English, French, Spanish, German, Italian
Package Dimension	305 mm × 305 mm × 315 mm (12.01" × 12.01" × 12.4")
With Package Weight	Approx. 2.9 kg (6.49 lb.)
Packing List	Device × 1 Regulatory Compliance and Safety Information × 1
Operating Temperature	-10 °C to 45 °C
Operating Humidity	< 90% (No condensation)

▪ Available Model

DS-QAZ0510G1

DS-QAZ0510G1/BLACK

▪ Dimension

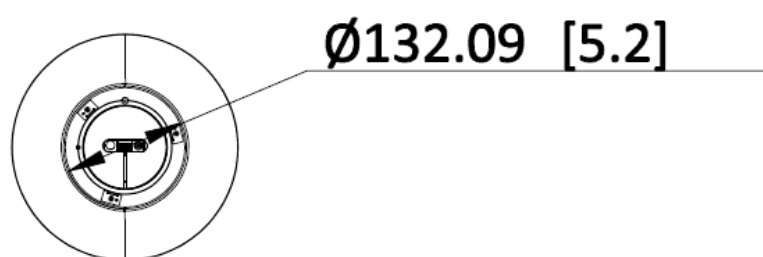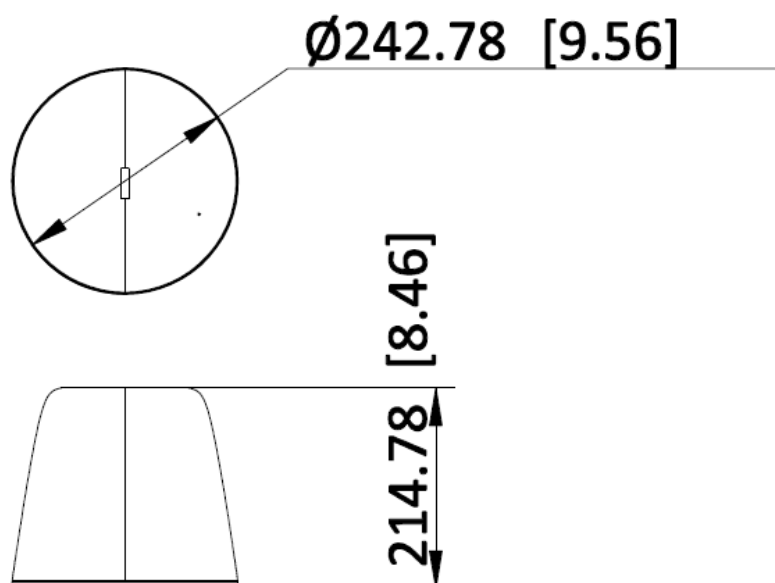

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION[®]