

# DS-QAZ0110G1-S Cabinet Secondary Speaker 10W



■ Full frequency 5.25" × 1

■ Rated Power: 10 W

• Sensitivity(1 m, 1 W): 90 dB

■ Max. SPL: 98 dB

■ Frequency Response: 100Hz~20kHz

■ Frequency Response: 100 Hz to 20 kHz

Support schedule/live/emergency broadcast; alarmlinkage; TTS

■ Black




### Specification

Speaker	
Rated Power	10 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	90 dB
Direction	All directions
Max. Acoustic Pressure	98 dBSPL
Frequency Response	100 Hz to 20 kHz
Coverage Angle	Horizontal:105°
	Vertical:103°
Interface	
Audio In	Fixed resistance input $\times$ 1 , 8 $\Omega$
General	
Material	Wooden
Operating Temperature	-10 °C to 50 °C(14 °F to 122 °F)
Operating Humidity	< 90% (No condensation)
Dimension	180.6 mm × 156 mm × 280 mm(7.11" × 6.14" × 11.02")
Package Dimension	355 mm × 265 mm × 240 mm(13.98" × 10.43" × 9.45")
Weight	Approx. 1.9 kg (4.19 lb.)
Color	Black
With Package Weight	Approx. 2.68 kg (4.91 lb.)
Packing List	Device × 1
	Screw pack×1
	Installation sticker ×1
	Regulatory Compliance and Safety Information × 1

#### Available Model

DS-QAZ0110G1-S

#### Dimension

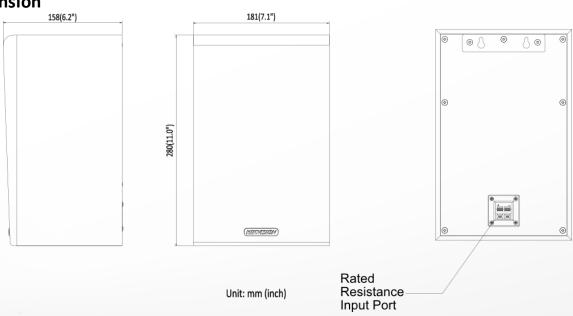

## See Far, Go Further



www.hikvision.com support@hikvision.com















