


DS-QAE0120G1R/EN(海外标配)/WHITE
Analog Cabinet Speaker 20W EN54

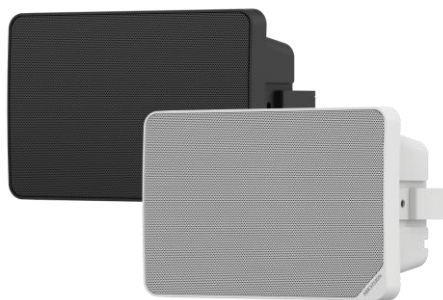

- 5.25" × 1
- Rated Power: 70 V: 5 W/10 W/15 W/20 W, 100 V: 5 W/10 W/15 W/20 W
- Sensitivity(1 m, 1 W): 90 dB ± 3 dB
- Max. SPL: 103 dB
- Frequency Response: 130 Hz to 17.5 kHz
- White or black appearance optional


▪ Specification

Speaker	
Rated Power	70 V: 5 W/10 W/15 W/20 W 100 V: 5 W/10 W/15 W/20 W
Impedance	8 Ω
Max. Acoustic Pressure	103 dBSPL
Sensitivity(1 m, 1 W)	90 dB $\pm$ 3dB
Direction	All directions
Frequency Response	130 Hz to 17.5 kHz
Speaker Unit	5.25" $\times$ 1
Interface	
Audio In	Fixed pressure in 100 V/Fixed pressure in 70 V/Fixed resistance input 8 Ω $\times$ 1
General	
Material	Main body&Front cover : plastic, bracket: metal
Operating Temperature	-30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F)
Operating Humidity	< 90% (No condensation)
Dimension	268.4 mm $\times$ 180.4 mm $\times$ 125.12 mm (10.57" $\times$ 7.1" $\times$ 4.93")
Package Dimension	340 mm $\times$ 306 mm $\times$ 180 mm (13.39" $\times$ 12.05" $\times$ 7.09")
Weight	Approx. 1.5 kg (3.3 lb.)
Color	White or black appearance optional
With Package Weight	Approx. 2 kg (4.4 lb.)
Packing List	Device $\times$ 1 U-shaped bracket $\times$ 1 Screw pack $\times$ 1 Installation sticker $\times$ 1 Regulatory Compliance and Safety Information $\times$ 1

▪ Available Model

DS-QAE0120G1R/EN/WHITE

▪ Dimension

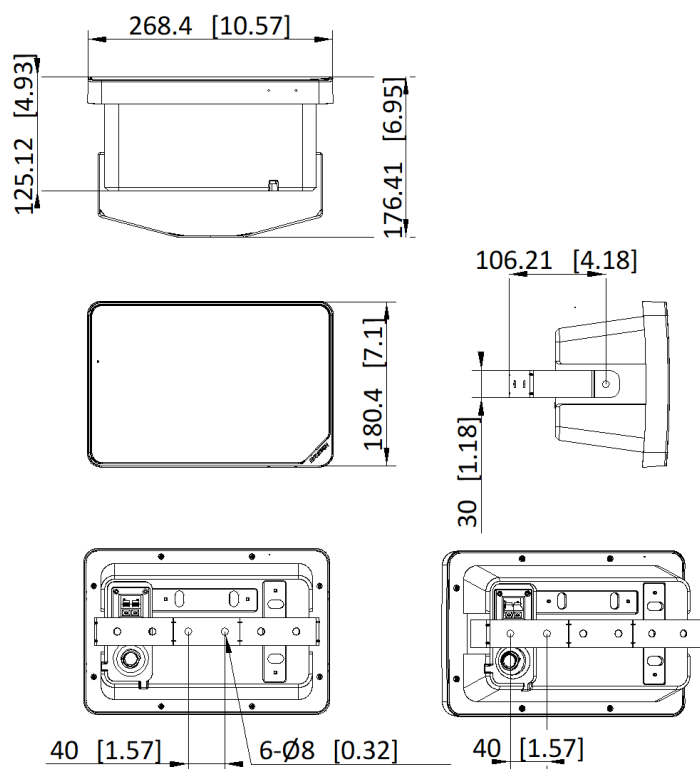

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

