

SYNTAX[®] CABLE

Technical datasheet

Cable code

7Z24ESX40

Description


SPEAKER 24x4.00 mm² PVC

Creation Date

19/04/2023

Revision Date

=

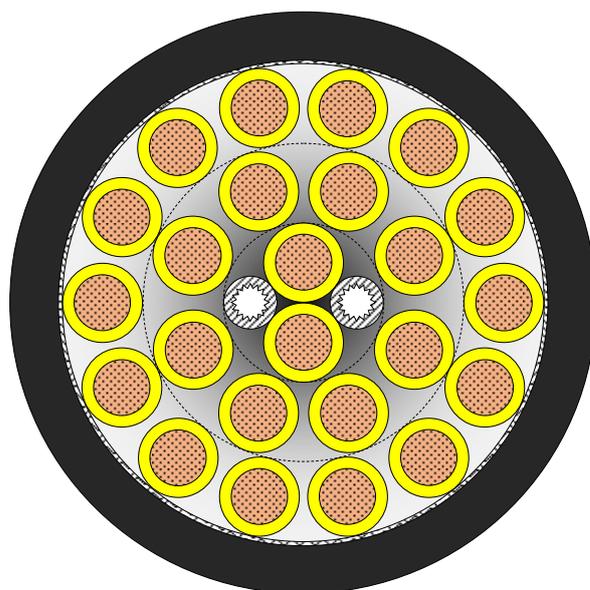

conductors				Standard
Conductor type	Stranded bare copper	Class	6	IEC 60228
Formation	126x0.20	Nom. Ø mm	2.60	

Insulation				Standard
Material	PVC	Type	R	IEC 60227
Nominal Ø (mm)	3.70	Tolerance	mm ± 0.10	
Colours	YELLOW RAL 1021 special coding – inkjet 1-24			

Outer jacket				Standard
Material	SOFT PVC	Type	R	IEC 60332-1
Nominal Ø (mm)	26.50	Tolerance	mm ± 0.50	
Colour	BLACK MATT RAL 9005 UV resistant - Flame retardant			
Printing	To be defined			

Electrical data

Voltage Test	V	2000	Capacitance	pF / m a 20°C	
Insulation Resistance	MΩ x km a 20°C	≥ 150	Inductance	mH / km a 20°C	
Electrical Resistance	Ω x km a 20°C	≤ 4.95	Impedence	=	

Physical data

Temperature range	°C	-30°C +70°C		
Bending Radius min.	mm	7x cable outer diameter (FIXED) – 15x cable outer diameter (MOBILE)		
Total Weight (nominal)	Kg / km	1380		

In accordance with the standard: *LV 2014/35/eu – ROHS 2015/863/eu*