



04C Ceiling Loudspeaker

①




Cut a Ø 180mm hole in the ceiling.

②

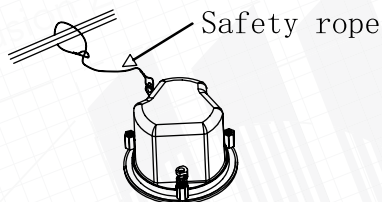


Secure safety cables near the reinforcing steel bars or bolts around the speaker holes to prevent them from falling off.

③




Remove the magnetic grill by pulling it from the speaker.

④

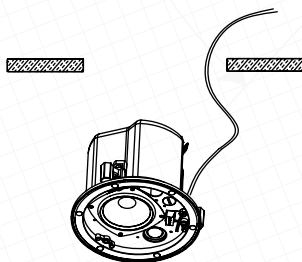


Route the power cord through the wiring holes to the front of the loudspeaker.

⑤

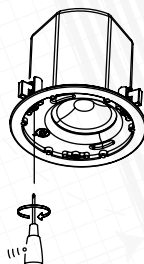

Install the loudspeaker into the pre-cut hole and tighten screws to secure 3 L-shaped brackets to the ceiling

⑥

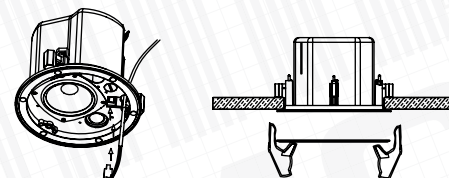

Connect the power cord to the Phoenix terminal and insert it into the socket. install the magnetic grill.

Please pay attention: Mount loudspeaker on the reliable base only.