

O4C

TWO-WAY CEILING LOUDSPEAKER

The O4C Ceiling Loudspeaker delivers highly responsive acoustic performance in a discreet ceiling-mounted design. Its two-way construction, featuring a crossover and a highly responsive woofer diaphragm, provides clear, balanced sound with uniform conical dispersion for consistent coverage throughout the space. The integrated back cover ensures reliable acoustic performance regardless of the ceiling type, make it suitable for background music, public address systems, and other indoor commercial applications. Designed for easy ceiling installation, loudspeaker features rimless magnetic grill that is available in white or black color.




Technical Specifications	O4C
Rated power	30 W RMS
Transformer power taps	20 W - 10 W - 5 W - 16 Ω
Sensitivity	87 dB (1 W/1 m)
Maximum SPL	108 dB (Pmax/1m) at 120 Hz
Frequency response	65 Hz - 20 kHz
Driver dimensions	4" (101 mm) woofer, 1" (2,54 mm) tweeter
Dispersion at 1000 Hz	180° (conical)
Dimensions (L x W x H)	Ø204 mm x 149 mm
Weight	2.3 kg
Material	Housing - ABS plastic, grill and dome - steel
Color	White (RAL9016), Black (RAL9017)

O4C


TWO-WAY CEILING LOUDSPEAKERS






Frequency response

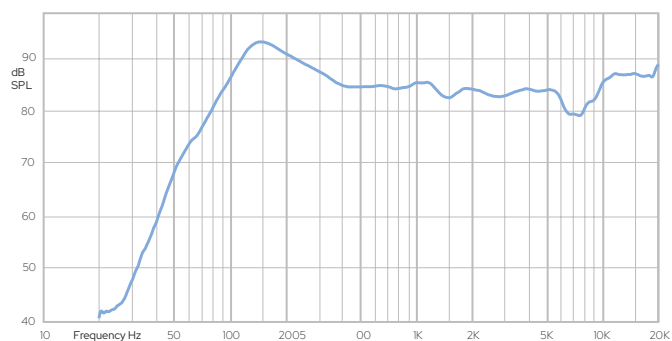

Impedance

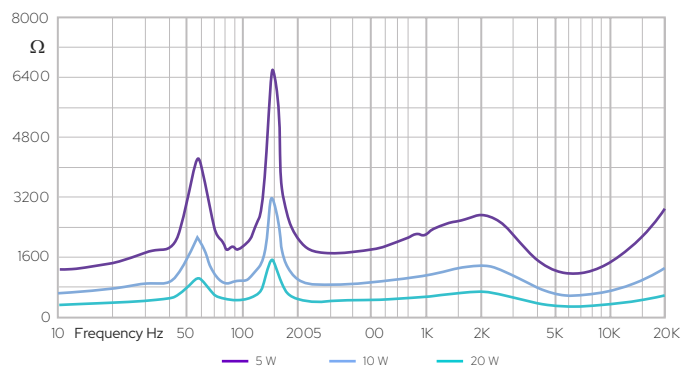

Horizontal/vertical polar diagrams

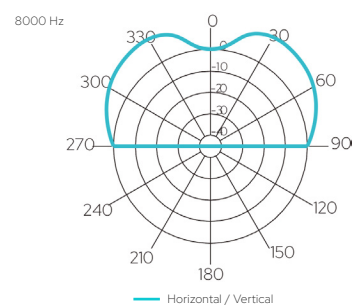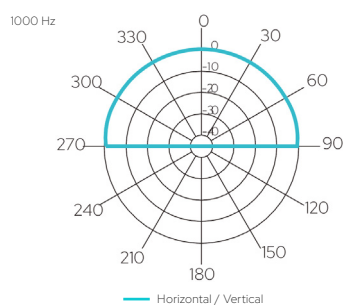

Dimensions



Ø 204 mm



149 mm