

**DS-QAPS6R6-6**  
**6.5" Frameless Ceiling Speaker 60W**






- 1 × 1.2-inch tweeter and 1 × 6.5-inch woofer
- 60 W Rated Power
- 91.5 dB Nominal Sensitivity
- 109 dB@1 m Rated Maximum SPL
- 85 Hz to 20 kHz (-10 dB) Bandwidth
- White or Black

## ▪ Specification

| Speaker                         |                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------|
| Impedance                       | 8 $\Omega$                                                                              |
| Rated Power                     | 60 W                                                                                    |
| Effective Bandwidth (-10 dB)    | 85 Hz to 20 kHz                                                                         |
| Total Harmonic Distortion (THD) | <1%                                                                                     |
| Sensitivity(1 m, 1 W)           | 91.5 dB                                                                                 |
| Maximum Sound Pressure Level    | 109 dB                                                                                  |
| Speaker Unit                    | 1 $\times$ 1.2-inch tweeter and 1 $\times$ 6.5-inch woofer                              |
| General                         |                                                                                         |
| Power                           | Impedance : 8 $\Omega$ /60WConstant voltage : 100V/70V                                  |
| Material                        | Main body: SPCC<br>Base: ABS+PC                                                         |
| Dimension                       | $\varnothing$ 327.49 $\times$ 179.69 mm (12.89" $\times$ 7.07")                         |
| Package Dimension               | 425 $\times$ mm $\times$ 425 mm $\times$ 310 mm (16.78" $\times$ 16.78" $\times$ 12.2") |
| Weight                          | 3.9 kg (8.6 lb.)                                                                        |
| With Package Weight             | 6.4 kg (14.11 lb.)                                                                      |
| Color                           | White / black                                                                           |
| Operating Temperature           | -10 $^{\circ}$ C to 45 $^{\circ}$ C (14 $^{\circ}$ F to 122 $^{\circ}$ F)               |
| Mounting Hole Dimension         | $\varnothing$ 300 mm (11.81")                                                           |
| Installation                    | Ceiling Mounting                                                                        |
| Mounting Depth                  | 174 mm (6.85")                                                                          |

## ▪ Dimension

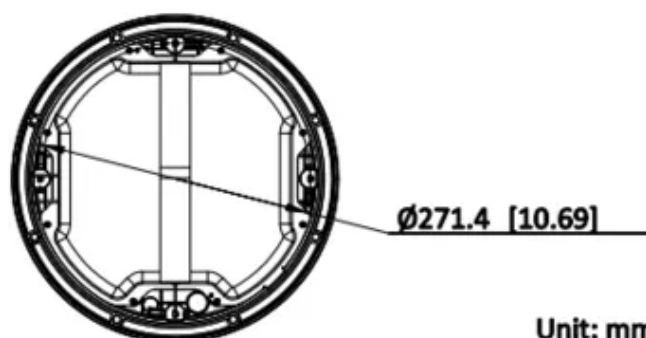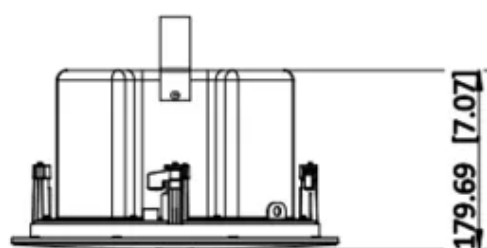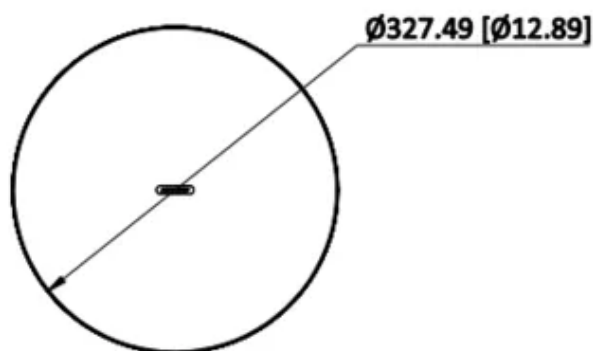

Unit: mm [inch]

|       |     |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

