

DS-UAC-S3 Wireless Speakerphone



- 8-microphone array with a 6m pickup radius
- 1.1-channel audio with automatic music/conference mode switching
- Dual bluetooth design with dongle and shared channels
- Wireless daisy chaining of up to 2 devices for large rooms
- Built-in audio algorithms: AEC, AGC, ANC
- High-performance speaker system with 8W output power
- NFC for quick pairing
- Palm mute for instant silence

▪ Specification


Microphone	
Type	MEMS
Pickup Range	Single unit: 5–6 m (radius) Cascaded: 8–10 m (radius)
Amount	8mic
Frequency Response	100Hz-15KHz(±3dB)
Sampling Rate	48KHz/16bit
Speaker	
Rated Power	8W(Maximum Output Power)
Functions	
LED Indicator	Light Bar Indicator: Displays battery level, volume, and other status information All buttons except Volume + / – are equipped with individual LED indicators, providing independent function status indication
Communication	
Communication Method	Type-C wired connection / USB Dongle / Bluetooth
Battery	
Capacity	3.7V / 4400mAh
Battery Life	Approx. 8 hours (music playback) Approx. 13 hours (conference usage)
Charging Time	Approx. 5 hours
Battery Type	Lithium-ion battery
Max. Charging Voltage	DC 5V 1A
Audio	
THD and SNR	THD < 1% 1KHz SNR ≥ 75dB
Interface	
Button	Call Answer / End: Supported (mobile phone calls only) Microphone Mute / Unmute Volume + / – Power On / Off & Battery Status Check Bluetooth On / Off, Connect / Disconnect Cascade Pairing / Unpairing
General	
Dimension	126 × 126 × 34 mm
Package Dimension	156 × 156 × 64 mm
Weight	400 g
With Package Weight	620 g
Operating Condition	Operating Temperature: 0–40 °C Operating Humidity: 10%–90% RH Operating Altitude: Below 5,000 m
Packing List	Wireless Speakerphone×1 USB Dongle×1 USB Type-C Cable×1 Quick Start Guide×1

Bluetooth	BT 5.3 A2DP、AVRCP、HFP、HSP 和 BLE Dual Bluetooth Modules
-----------	--

▪ Available Model

DS-UAC-S3

▪ Dimension

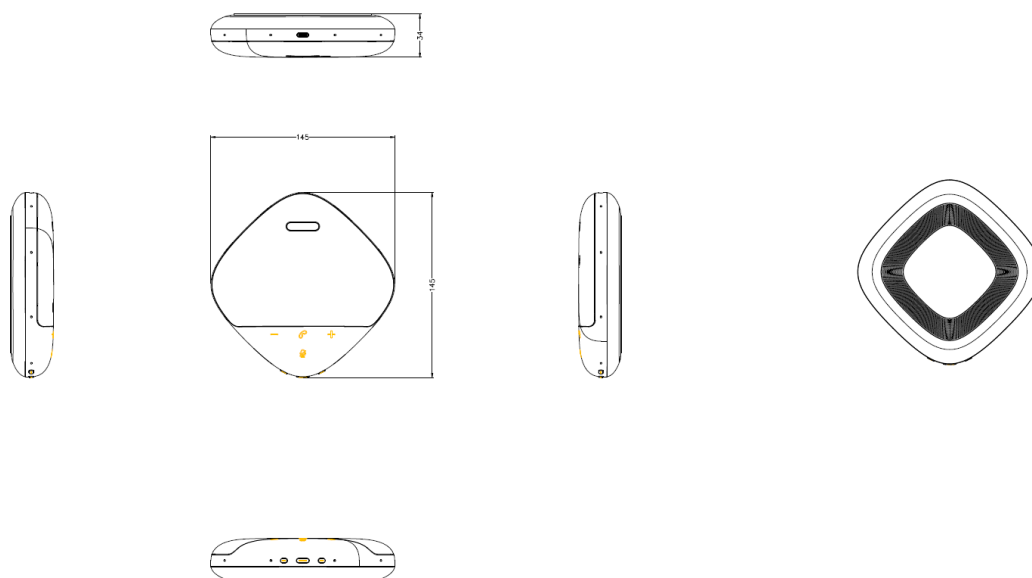

See Far, Go Further



www.hikvision.com
support@hikvision.com

