

DS-QAC0130G1-4 4" Analog Cabinet Speaker






- Rated power: 35W
- Sensitivity(1m,1W) : 86dB
- Max SPL : 101dB(Rated Power)
- Frequency Response : 75Hz~20kHz(-10dB)
- Speaker unit : 1 × 1.0-inch tweeter and 1 × 4.0-inch woofer
- Power : Input impedance: 8Ω/35W;Constant voltage 100V/30W;Constant voltage 70V/30W
- Color : Black and white optional
- Protection : IP65
- Features secure front fixation with adjustable angles.
- Supports quick installation with no visible wires or brackets on the back for a clean appearance.

▪ Specification

Speaker	
Impedance	8Ω
Speaker Unit	Woofer: 1×4.0" Tweeter: 1×1.0"
Coverage Angle	H150° × V110°
Audio	
Rated Power	35W
Sensitivity	86dB@1m/1w
Maximum Sound Pressure Level	Rated Power : 101dB Peak Power : 107dB
Frequency Response	-10dB : 75-20kHz
System Configuratio	Two-way crossover
Program Power	70W
Peak Power	140W
Interface	
Audio In	4-pin Phoenix connector × 1
Voltage Input	Constant voltage 100V: 30W, 15W, 7.5W, 3.75W Constant voltage 70V: 30W, 15W, 7.5W
General	
Power	Input impedance: 8Ω/35W;Constant voltage 100V/30W;Constant voltage 70V/30W
Material	Body: Plastic Steel mesh: Metal
Dimension	249.61×149.96×190.7mm
Package Dimension	324mm X 238mm X 246mm
Weight	2.7kg
With Package Weight	3.3kg
Color	Black and white optional
Packing List	Complete unit × 1; SQG × 1; 4-pin Phoenix terminal × 1
Operating Temperature	-10°C ~ 45°C , <90%RH
Installation	Wall-mounted installation
Bracket Adjustment Angle	Up: 5° Down: 30° Left: 30° Right: 30°
Approval	
Protection	IP65

▪ Dimension

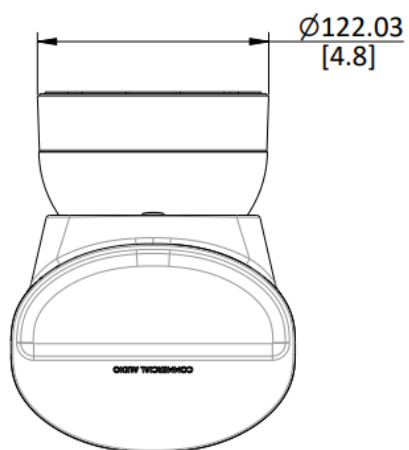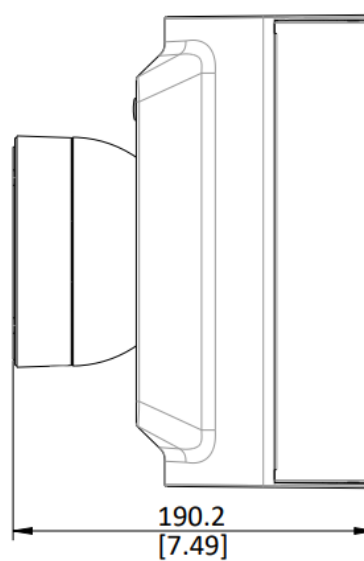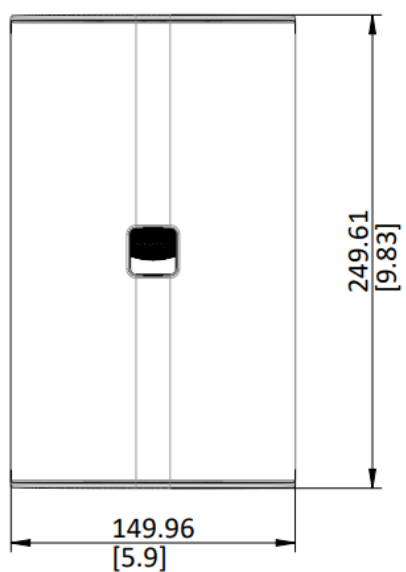

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

