

DS-QAC0660G1-6 6.5" Analog Ceiling Speaker




- Rated power: 60W
- Sensitivity(1m,1W) : 91dB
- Max SPL : 108dB(Rated Power)
- Frequency Response : 65Hz~20kHz(-10dB)
- Speaker unit : 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Power : Input impedance: 8Ω/60W;Constant voltage 100V/30W;Constant voltage 70V/30W
- Color : Black and white optional

▪ Specification

Model		DS-QAC0660G1-6
Speaker	Impedance	8Ω
	Speaker Unit	Woofer: 1×6.5" Tweeter: 1×1.0"
Audio	Rated Power	60W
	Sensitivity	91 dB
	Maximum Sound Pressure Level	Rated Power: 108dB Peak Power: 114dB
	Frequency Response	-10dB: 65-20kHz
	System Configuratio	Two-way crossover
	Program Power	120W
	Peak Power	240W
Interface	Audio In	4-pin Phoenix connector × 1
	Voltage Input	Voltage Input Constant voltage 100V: 30W, 15W, 7.5W, Constant voltage 70V: 30W, 15W, 7.5W 3.75W
General	Power	Input impedance: 8Ω/60W
	Material	Body: Plastic Steel mesh: Metal
	Dimension	Ø247.58 × 228.7 mm
	Package Dimension	345mm X 345mm X 285mm
	Weight	4632g
	With Package Weight	5642g
	Color	Black and white optional
	Packing List	Complete unit × 1; SQG × 1; 4-pin Phoenix terminal × 1
	Operating Temperature	-10°C ~ 50°C, <90%RH
	Mounting Hole Dimension	Ø224 mm (8.82")
	Installation	Ceiling mount
	Mounting Depth	232 mm (9.13")

▪ Dimension

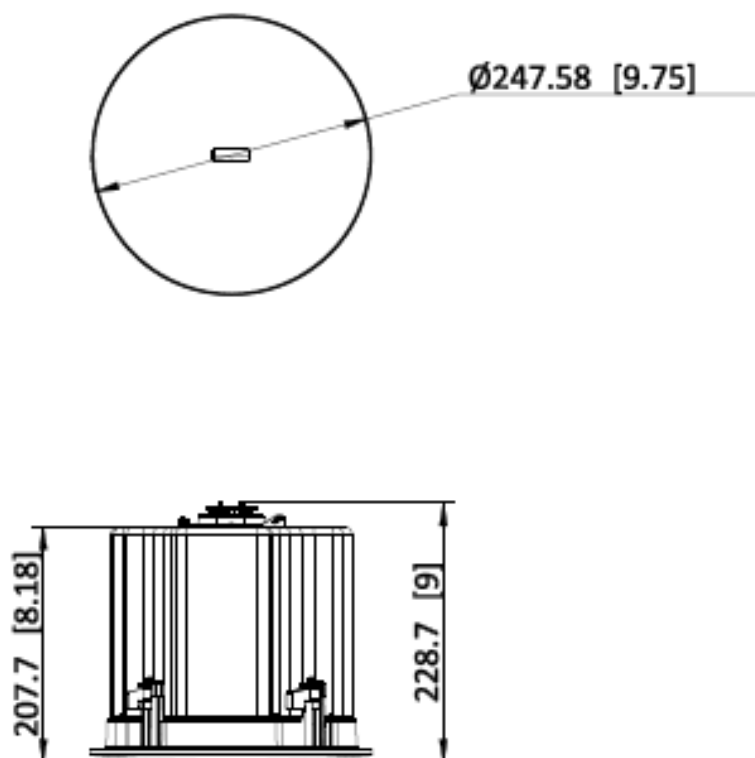

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

