

DS-QAC0660G1-60 **6.5" Analog Ceiling Speaker**




- Rated power: 60W
- Sensitivity(1m,1W) : 89dB
- Max SPL : 107dB(Rated Power)
- Frequency Response : 60Hz~20kHz(-10dB)
- Speaker unit : 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Color : Black and white optional

▪ Specification

Speaker	
Impedance	8Ω
Speaker Unit	Woofer: 1×6.5" Tweeter: 1×1.0"
Audio	
Rated Power	60W
Sensitivity	89dB
Maximum Sound Pressure Level	Rated Power : 107dB Peak Power : 113dB
Frequency Response	-10dB : 60-20kHz
System Configuratio	Two-way crossover
Program Power	120W
Peak Power	240W
Interface	
Audio In	4-pin Phoenix connector × 1
Voltage Input	Constant voltage 100V: 30W, 15W, 7.5W, 3.75W Constant voltage 70V: 30W, 15W, 7.5W Input impedance: 8Ω
General	
Power	Input impedance: 8Ω/60W
Material	Body: Plastic Steel mesh: Metal
Dimension	Ø247.58 × 111.76 mm
Package Dimension	295mm X 295mm X 160mm
Weight	3001.4g
With Package Weight	3389.5g
Color	Black and white optional
Packing List	Complete unit × 1; SQG × 1; 4-pin Phoenix terminal × 1
Operating Temperature	-10°C ~ 50°C , <90%RH
Mounting Hole Dimension	Ø224 mm (8.82")
Installation	Ceiling mount
Mounting Depth	105 mm (4.13")

▪ Dimension

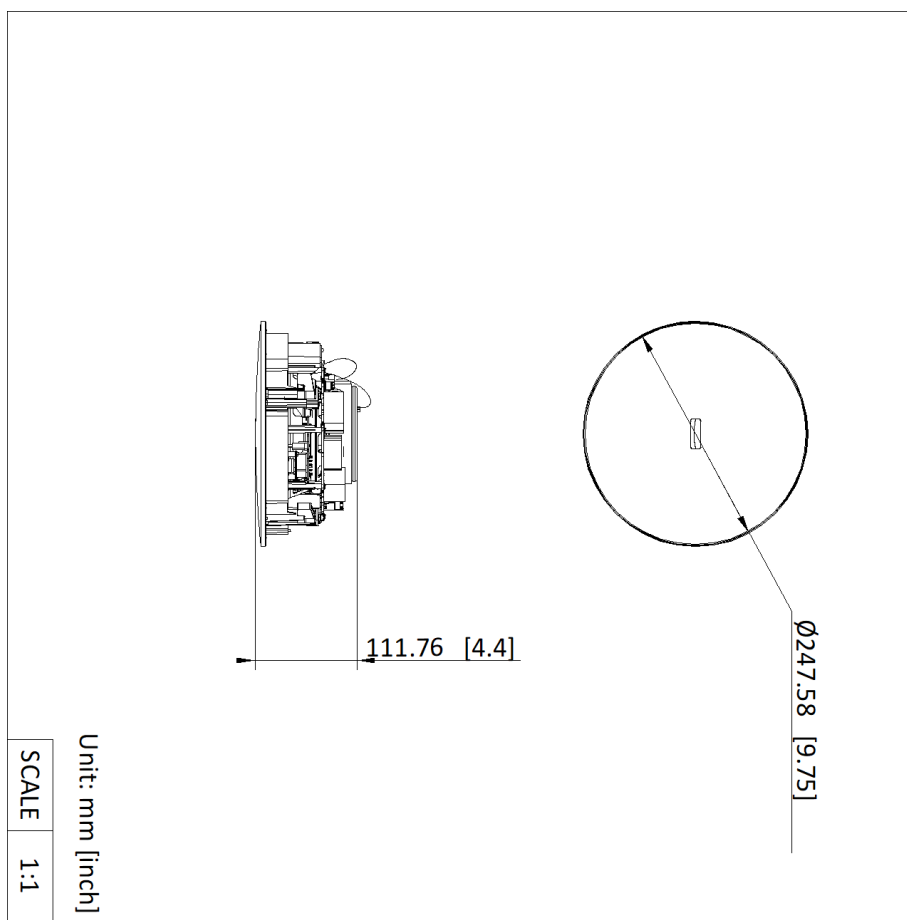

See Far, Go Further



www.hikvision.com
support@hikvision.com

