

DS-QAC0560G1-6 6.5" Analog Pendant Speaker




- Rated power: 60W
- Sensitivity(1m,1W) : 91dB
- Max SPL : 108dB(Rated Power)
- Frequency Response : 65Hz~20kHz(-10dB)
- Speaker unit : 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Power : Input impedance: 8Ω/60W;Constant voltage 100V/30W;Constant voltage 70V/30W
- Color : Black and white optional

▪ Specification



Speaker	
Impedance	8Ω
Speaker Unit	Woofer: 1×6.5" Tweeter: 1×1.0"
Audio	
Rated Power	60W
Sensitivity	91dB
Maximum Sound Pressure Level	Rated Power : 108dB Peak Power : 114dB
Frequency Response	-10dB : 65-20kHz
System Configuratio	Two-way crossover
Program Power	120W
Peak Power	240W
Interface	
Audio In	4-pin Phoenix connector × 1
General	
Power	Input Constant voltage 100V: 30W, 15W, 7.5W, Voltage Input Constant voltage 70V: 30W, 15W, 7.5W 3.75W Input impedance: 8Ω/60W
Material	Body: Plastic Steel mesh: Metal
Dimension	Ø252.31 × 267.57 mm
Package Dimension	350mm X 350mm X 343mm
Weight	4115.3g
With Package Weight	5423.7g
Color	Black and white optional
Packing List	Complete unit × 1; SQG × 1; 4-pin Phoenix terminal × 1
Operating Temperature	-10°C ~ 50°C , <90%RH
Installation	Pendant

▪ Dimension

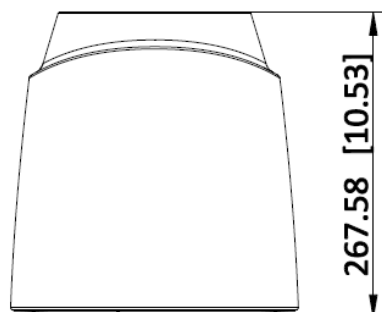

Ø252.31 [Ø9.93]

Ø118.6 [Ø4.67]

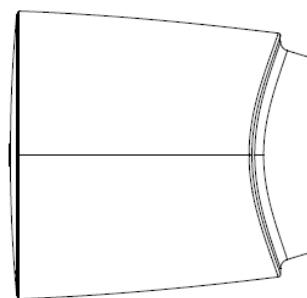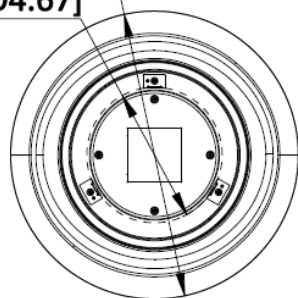

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

